

# Thermocouples Coated to Survive Longer

Introducing the best defense ever...



**EtchDefender™**  
T E C H N O L O G Y

**Quartz TCs for ASM Epi with EtchDefender™ coating last up to 3X longer**

Thermocouples for  
**ASM Epsilon® Reactors**  
and **Diffusion Furnaces**



**Ideas. Solutions. Success.**

# Patented EtchDefender™ coating



## Up to 3X longer life and savings of 35%-45%

Conax introduces EtchDefender™—the patented solution for extending the life of quartz thermocouple sheaths.

EtchDefender™ is a quartz coating technology that can triple the life of the quartz sheath and provide savings of 35% to 45%.

Conax's cutting-edge technology has been tested both in the laboratory and in a production environment at a major wafer manufacturing facility.



## EtchDefender™ advantages

Laboratory and production testing have shown:

- **No particulation**—EtchDefender™ coating is well adhered and will not flake from the quartz substrate, which causes particle contamination to the wafer.
- **Durability**—The coating does not decompose, out-gas or sublime under vacuum at high temperature.
- **Slower devitrification**—The coating greatly slows the devitrification process typical of quartz sheaths used in the Epsilon by retarding the loss of oxygen from the  $\text{SiO}_2$  quartz sheath at temperatures more than 900C.
- **Slower erosion**—The coating greatly retards the erosion process caused by hot corrosive gases flowing at high concentrations and velocities. This is most relevant in extending the life of the Center Thermocouple.
- **Longer life**—The coating will allow quartz sheaths to last up to three times longer.

## Thermocouple coated with EtchDefender™ versus standard TC



*Uncoated quartz TC sheath at end of life.*



*EtchDefender™ Technology coated quartz sheath at 50% more wafers than TC shown on left. This sensor is currently at the mid-point of its useful life.*



## Greater productivity and consistency

Allowing a tool to run continuously with no maintenance cycles required to change thermocouples will not only allow for increased process uptime but will reduce process variation, allowing more wafers to be produced per tool with higher consistency.

Using TCs coated with EtchDefender™ will result in reduced labor and increased safety. In addition, by reducing invasive chamber maintenance, Conax EtchDefender™ helps decrease the risk of technicians igniting pyrophoric deposits.

Reduced maintenance cycles in the SiGe process also decrease the number of times the chamber is exposed to oxygen and the time needed to totally purge the oxygen from all surfaces.


## ASM Epsilon single-wafer Epi Tool

The epitaxial process takes place at one of the highest temperatures of any in the manufacture of integrated circuits. Because the ASM Epsilon single-wafer epitaxial tool uniquely utilizes thermocouples that are installed inside the reactor chamber for process control, the thermocouples are often exposed to two temperature cycles that can range from 600C to 1200C for each wafer processed.

The second temperature cycle is the etch process, which is used to clean the chamber and all the internal components with hydrochloric acid at extremely high temperatures. As thermocouples are subjected to these cycles and corrosive hydrochloric acid etches, the quartz sheath is attacked and ultimately fails, requiring a maintenance cycle to replace them.


The etch process is critical to the proper operation of the tool and maximizes yield by minimizing wafer-to-wafer contamination. If the tool is under-etched, particle generation occurs and wafer yield will drop. If the tool is over-etched, quartzware attack is greatly accelerated which causes premature failure of the quartz thermocouple sheaths, causing wafer loss and non-scheduled tool maintenance.

Our goal was to develop a solution that protects the quartz sheath during the etch process and slows devitrification to extend its life, increasing uptime and decreasing maintenance cycles. Our complete line of thermocouples for ASM Epsilon Reactors is now available with EtchDefender™ coating.

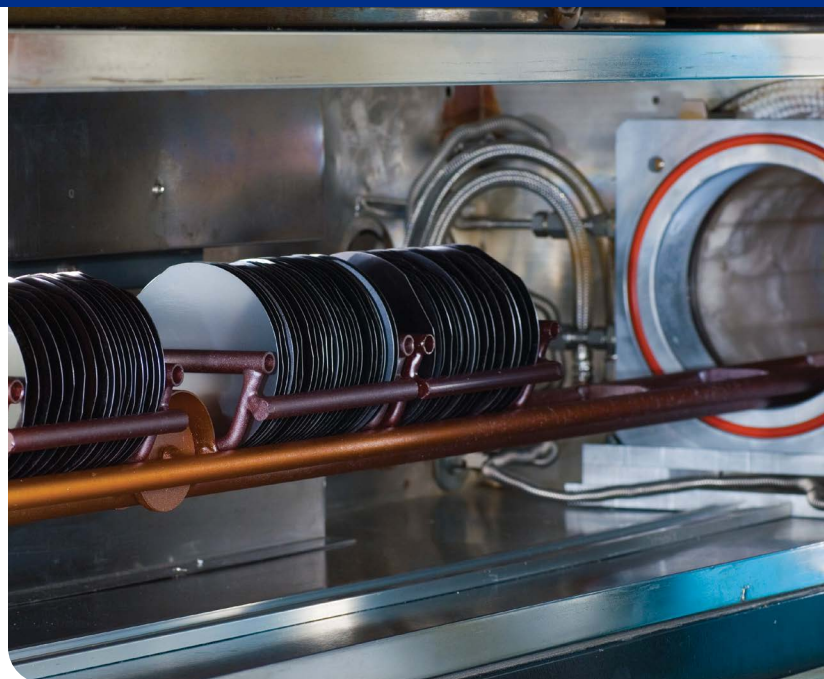



# Thermocouples for ASM Epsilon<sup>®</sup> Reactors



Conax manufactures sensors using the best available materials, cleanest assembly cell and the finest workmanship in the industry.

## Best available materials

- **Pt and Pt/Rh wires** are manufactured from mined ores—not manufactured from recycled materials.
- **Quartzware** is exclusively semiconductor grade with three available levels of quality.
- **Insulators** are of 99.5% purity or better, and are fired to remove organic impurities.
- **Connectors** are laser engraved with serial numbers (see photo above right).

## Quality craftsmanship


- Conax is ISO 9001:2008 and AS9100C certified, and experienced and certified assemblers are used for every operation.
- Electronic process flow, work instructions and revision control ensure manufacturing integrity.
- Rigorous testing is performed at all assembly steps.
- Precision laser welding is used to microscopically weld and immediately inspect the quality of every junction. The process minimizes HAZ (Heat Affected Zone) damage to the very small diameter wires and junctions used within the product line.
- Each junction is again microscopically inspected after welding to ensure no damage was done to the wire as the junction was positioned against the insulator. A microscopic photograph of each junction is taken before and after it is properly positioned for quality control documentation purposes.





## Cleanest assembly cell

- Our state-of-the-art ASM thermocouple assembly area is kept separate from the general production area and incorporates key clean room standards that minimize airborne particles.
- Each assembler works on a laminar flow table that provides a Class 100 clean room environment.
- All drawings and work instructions are electronic to eliminate particle generation and contamination from paper documents and to ensure that units are produced only to the latest revision of documents.
- Assemblers are outfitted in clean room apparel, gloves and magnifying goggles.

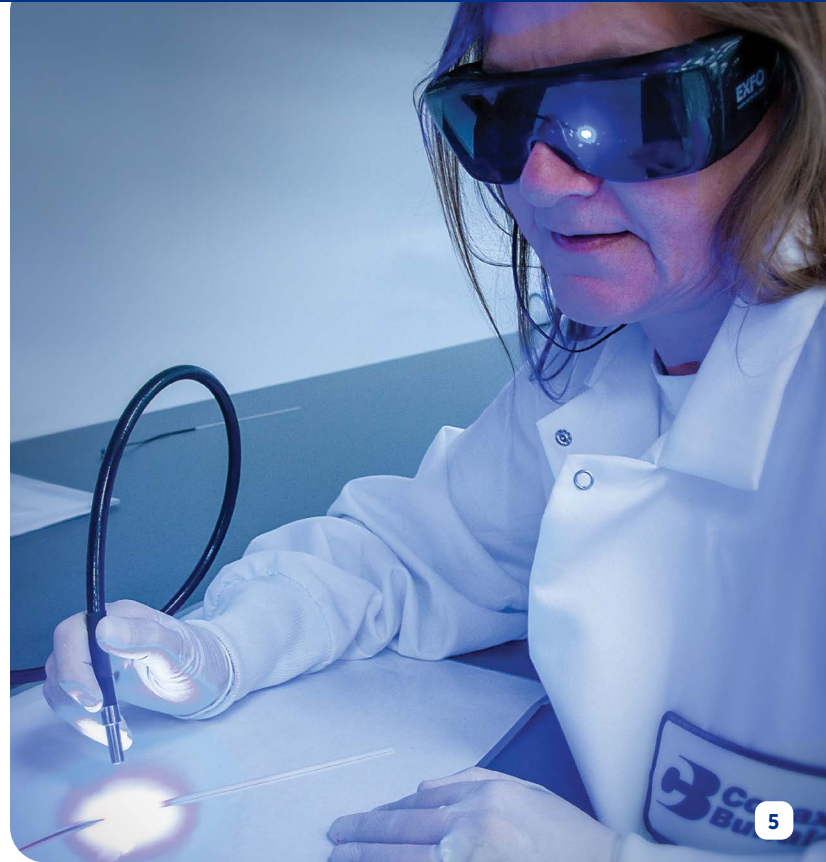

**1** Laser-engraved connector.

**2** Precision laser welding process.

**3** Extensive testing of quartz sheaths ensures correct size, shape and quality standards.



**4** Profile Thermocouple assembly laminar flow tables and sensor calibration area.

**5** Application of ultraviolet cured epoxy.

**6** Microscopic inspection is performed following welding.

**7** Top view of 200mm susceptor ring showing Front, Side and Rear thermocouples in place.

**8** TIG welding used for larger diameter wires in Profile and Spike Thermocouples.

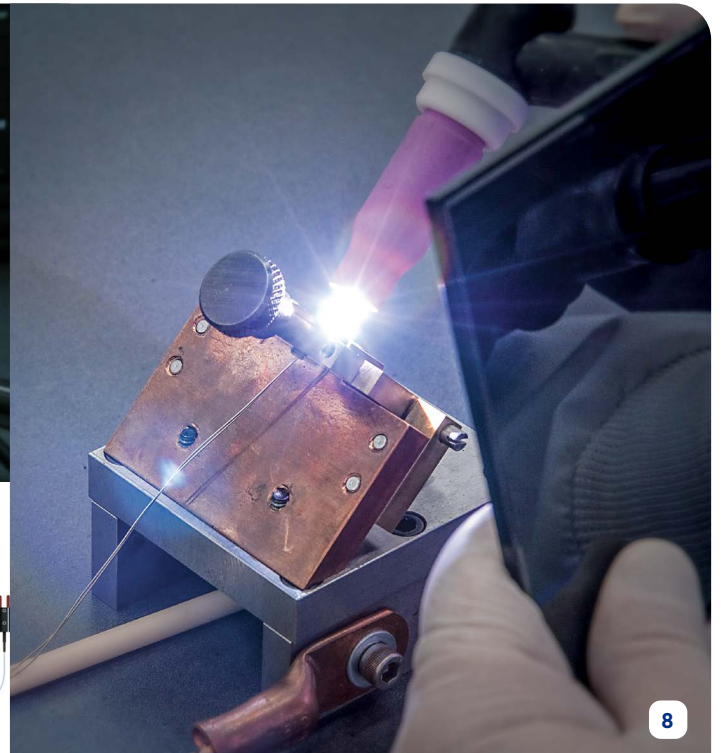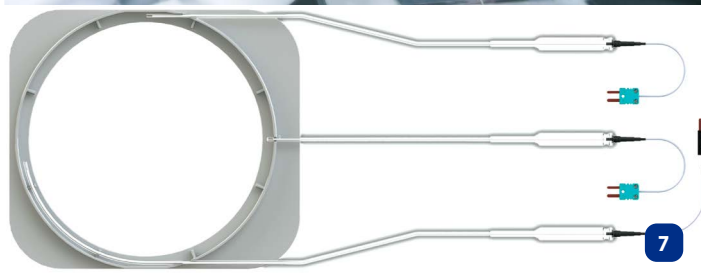

# Superior performance

The two critical performance measurements used to evaluate temperature sensors are runtime longevity and lower cost of ownership. Conax provides you with both.

## Runtime longevity

Our high quality products alone are proven to provide runtimes that exceed the OEM and aftermarket producers. Now, with the addition of EtchDefender™ coating, Conax thermocouples can extend the life of the quartz sheaths by up to three times.


Our objective is to design and produce sensors that are so well made that they do not fail before scheduled PMs occur. We don't want you to have to take a reactor out of production simply because you need to change a thermocouple.

By selecting the EtchDefender™ coating for your process (see chart on page 10), you can count on TCs lasting beyond the next limiting factor (most often, susceptor life). This reduces the number of times your process chamber must be opened, delivering increased safety and savings of time and money.

This will improve wafer quality and yield with:

- Less moisture in the process chamber and exhaust system minimizing residue explosion potential.
- Reduced particle generation and wafer contamination that increase yield.
- Increased number of wafers produced per thermocouple to decrease cost of ownership.
- Fewer maintenance hours spent per reactor per wafer increasing profit.


When we build products with different configurations (e.g., our new EtchDefender™ coating, thicker sheaths, and thinner wire), our product improvements are in the 160-700% range. This is particularly true when we can customize your products to include the improvements you need to optimize your specific processes.

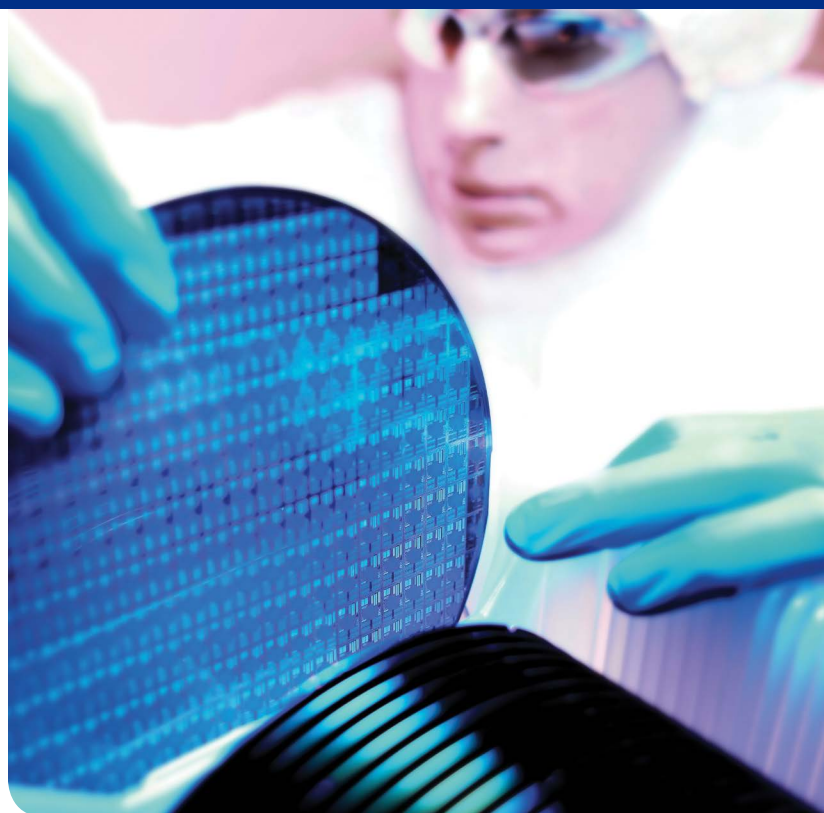

## Lower cost of ownership per reactor—two ways

Clearly a sensor set that lasts longer translates into a lower cost of ownership—and can reduce by 50% or more the number of PMs required solely to change our thermocouples. This has translated into a \$1 million annual revenue increase of end product for one Conax customer.

Another important way Conax can reduce your cost of ownership significantly is by designing robust products into one or two key sensors that serve in challenging locations within the reactor (e.g., center and front) while using less robust, less costly designs for other locations. We have participated in cost reduction programs in the 20-40% range throughout the fab, which in some cases translates into several hundreds of thousands of dollars in savings.

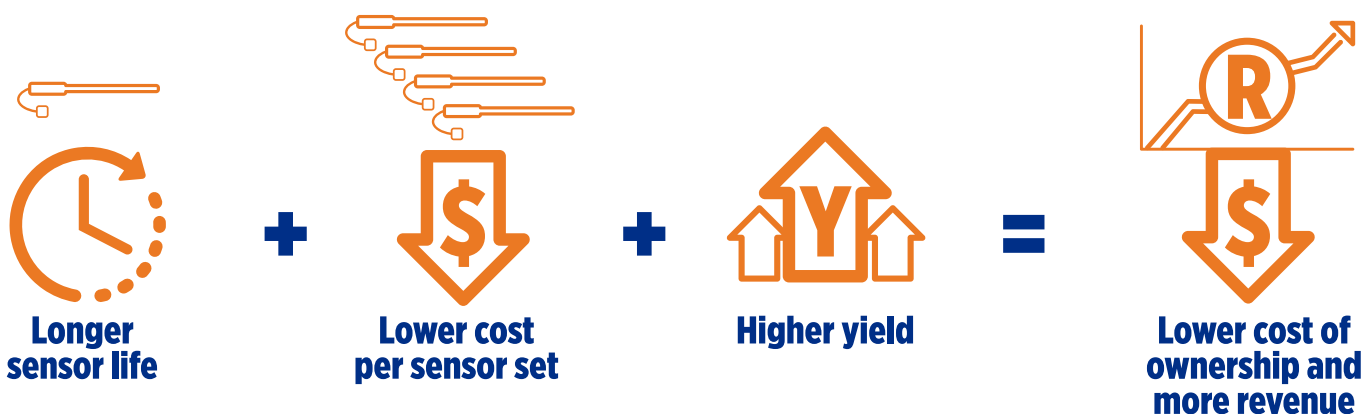



## Customized solutions


Conax will customize designs and configure sensor sets that optimize your specific performance objectives.

We understand that one or two product designs provided by the OEM and other suppliers are simply not enough to satisfy your specific performance objectives. Every customer is different and their needs are unique. We work with each customer as a partner and strive to meet their demands for continuous performance improvements.

We can add performance improvements by optimizing temperature sensor designs within those processes. For instance, sensors serving in more demanding environments (e.g., centers) should be constructed as robustly as possible. While others within the susceptor may not be exposed to the same environmental challenges. Therefore a less robust and less costly design is sufficient.

Conax will work with you to design sensors that are ideally suited for your processes, and we can produce them for any design variability that you need:


- NEW—EtchDefender™ quartz sheath coating—up to 3X longer life
- Thick wire—thick quartz
- Thick wire—thin quartz
- Thin wire—thick quartz
- Diffused or clear sheaths
- Center sensors with non-diffused, long life tips

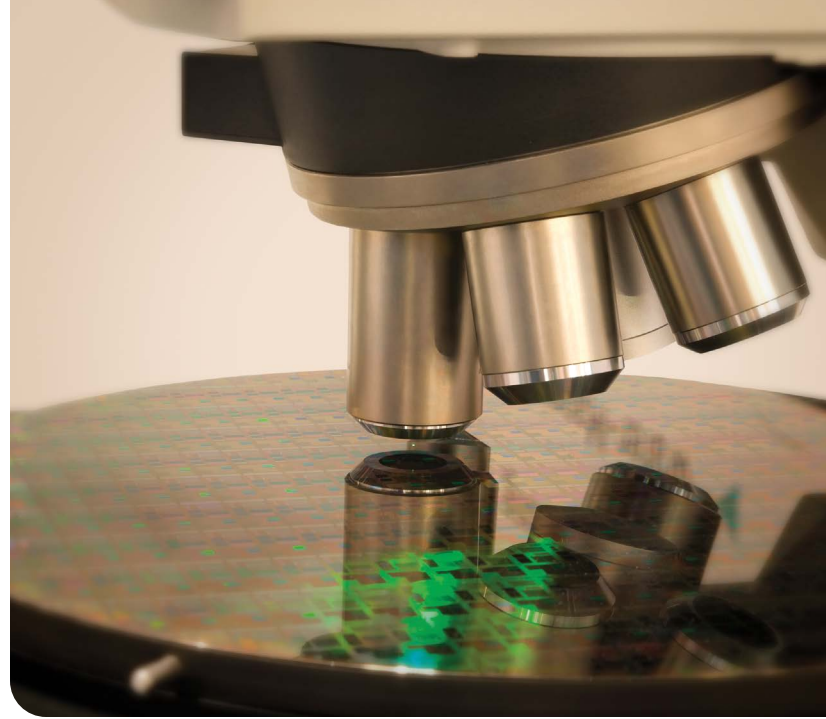

To start the selection process, our sales engineers will work with you to help determine the various set configurations you want and will consult with our product engineers as needed, depending on the degree of customization you require.

The following pages show you how to specify the configuration solutions you need for your production objectives.

### Center Thermocouple Configuration Options

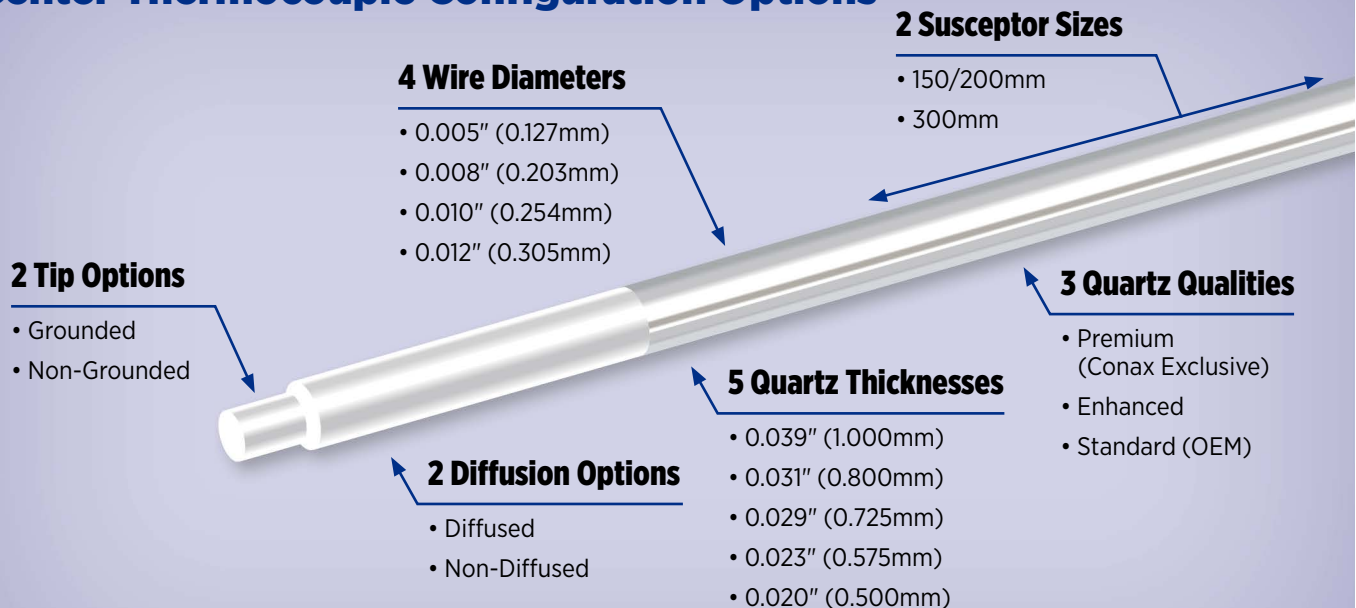

# Specifying your sensors

We start specifying our sensors using a base configuration model comprised of selecting one of SEVEN QUARTZ SHEATH THICKNESS OPTIONS and one of FOUR WIRE DIAMETER OPTIONS creating the possibility of TWENTY-EIGHT BASE CONFIGURATION MODELS.

## Customize your sensors with the features you need

From there, you can add customized features to each of your sensor types—Center, Side, Rear, Front or Bijunction. Customized features include:

- Our patented EtchDefender™ coating
- Three quality grades of quartz sheaths—OEM Standard (S), Conax Enhanced (E) and Conax Premium (P)
- Center TC tip options—grounded or non-grounded
- Diffusion options—non-diffused or diffused
- Packing—standard or special
- Other optional features (consult factory)

Quartz Sheath Thicknesses	Wire Diameters
<b>Series 59:</b> 0.059" (1.500mm) <b>Series 49:</b> 0.049" (1.250mm) <b>Series 39:</b> 0.039" (1.000mm) <b>Series 31:</b> 0.031" (0.800mm) <b>Series 29:</b> 0.029" (0.725mm) <b>Series 23:</b> 0.023" (0.575mm) <b>Series 20:</b> 0.020" (0.500mm)	<b>Variation 05:</b> 0.005" (.127mm) <b>Variation 08:</b> 0.008" (.203mm) <b>Variation 10:</b> 0.010" (.254mm) <b>Variation 12:</b> 0.012" (.305mm)

### Conax product description template

For Center	Specify Product Line	Specify Susceptor Ring Size	Specify Susceptor Location	Specify Quartz Thickness (see chart)	Specify Quartz Diameter (see chart)
	AE = ASM Epsilon	150/200 = 150mm or 200mm 300 = 300mm	CR = Center Reduced Pressure CA = Center Atmospheric	39 = 0.039" (1.000mm) 31 = 0.031" (0.800mm) 29 = 0.029" (0.725mm) 23 = 0.023" (0.575mm) 20 = 0.020" (0.500mm)	05 = 0.005" (.127mm) 08 = 0.008" (.203mm) 10 = 0.010" (.254mm) 12 = 0.012" (.305mm)
	Specify Quartz Quality	Specify Tip Configuration	Specify Diffusion Option	Specify Special Options	
	P = Premium E = Enhanced S = Standard	G0 = Non-Grounded G1 = Grounded	D0 = Non-Diffused D1 = Diffused	E3 = EtchDefender™ coating Other options—consult factory	

	Specify Product Line	Specify Wafer Size	Specify Susceptor Location	Specify Quartz Thickness (see chart)	Specify Quartz Diameter (see chart)	Specify Quartz Quality	Specify Special Options
For Side, Rear, Front or Bijunction	AE = ASM Epsilon	150 = 150mm 200 = 200mm 300 = 300mm	F = Front R = Rear S = Side B = Bijunction	59 = 0.059" (1.500mm) 49 = 0.049" (1.250mm) 39 = 0.039" (1.000mm) 31 = 0.031" (0.800mm) 29 = 0.029" (0.725mm)	05 = 0.005" (.127mm) 08 = 0.008" (.203mm) 10 = 0.010" (.254mm) 12 = 0.012" (.305mm)	P = Premium E = Enhanced S = Standard	EtchDefender™ coating (consult factory)

Center Examples	OEM Equivalent	AE - 150/200CR - 2310S - D1G1	For those seeking an OEM equivalent sensor.
	Conax	AE - 150/200CR - 3908E - D1G1	For those seeking a superior sensor solution where a thicker quartz sheath is an advantage and wire life is typically not an issue.
	Conax	AE - 150/200CR - 3110P - D0G0 - E3	For those seeking the ultimate quartz life where EtchDefender™ coating plus a thicker/better quartz and robust wire size provides the potential for using a single thermocouple up to 3x longer.

Front, Side, Rear or Bijunction Examples	OEM Equivalent	AE - 300B - 3910S	For those seeking an OEM equivalent sensor.
	Conax	AE - 300B - 4908P	For those seeking a superior sensor solution where a thicker quartz sheath is an advantage and wire life is typically not an issue.
	Conax	AE - 300B - 4910P - E3	For those seeking the ultimate quartz life where EtchDefender™ coating plus a thicker/better quartz and robust wire size provides the potential for using a single thermocouple up to 3x longer.



## Customizing your design

We can design a sensor set that is the same as any sensor on the market—particularly the OEM equivalent products. If you want additional performance improvements, we offer a variety of customization possibilities.

### Standard Product Features

- 150mm, 200mm and 300mm thermocouples are available
- Type R thermocouple wire
- Sheaths are manufactured from semiconductor-grade quartz tubing
- Laser engraved serial numbers are easy to read and used for material and build traceability

### Custom Design Idea #1

**Make the Center TC as robust as possible—and make all other sensors as economical as possible.**

Failure rates are highest in the Center sensors and lower for other positions. Configure your sensor set by selecting the best features for the Center sensor and save money on the other three.

Design the Center TC with the thickest quartz with EtchDefender™ coating and the highest quality sheath. Add the largest cross sectional wire possible (e.g., base configuration model AE-150/200CR-3110P-GODO-E3.) Then specify the standard OEM design for the other three sensors or consider incorporating a smaller diameter wire version of the standard OEM design for the other thermocouples, such as an AE-200S-2908S, etc.



### Custom Design Idea #2

**Fine tune each sensor according to the specific performance objectives and production recipe you require.**

If a production run requires certain product attributes (see prior page), Conax can produce those sensors without having to sell them as a bundled sensor set. For instance, if running a silicon germanium wafer process requires a different recipe than a silicon wafer process, which in turn produces different temperatures and environments within the chamber, we can design a sensor configuration for those differences that minimizes your TC set cost while maximizing your yield and efficiency.

### Custom Design Idea #3

**Experiment with a variety of designs for each wafer process in order to optimize performance.**

Conax can provide you with hundreds of configuration possibilities. The Conax Product Selection chart on the following page shows all the possible base model configurations—and those items that we have in stock.



Product Selection Chart—Conax Thermocouples for the ASM Epsilon Reactors

This product chart illustrates several things. The chart shows all base configuration models that Conax can produce with the exception of the grey cells.

Susceptor Ring Size	Series	Center Thermocouples			
		Wire Diameter			
	Sheath Thickness	Variation 05 DIA = .005" (.127mm)	Variation 08 DIA = .008" (.203mm)	Variation 10 DIA = .010" (.254mm)	Variation 12 DIA = .012" (.305mm)
150mm	Beginning Series Description	AE-150/200CR- or AE-150/200CA-			
	Series 59: 0.059" (1.500mm)				
	Series 49: 0.049" (1.250mm)		4908P-G0D0	4910P-G0D0	4912P-G0D0
	Series 39: 0.039" (1.000mm)	3905P-G0D0			
	Series 31: 0.031" (0.800mm)		3108P-G0D0	3110P-G0D0 02-352105D01 02-352105D02	
	Series 29: 0.029" (0.725mm)				
	Series 23: 0.023" (0.575mm)		2308E-G1D1 2308S-G1D1	2310E-G1D1 2310S-G1D1 02-321895D01 02-323584D01	2312E-G1D1
	Series 20: 0.020" (0.500mm)		2008P-G0D1 2008E-G0D1	2010E-G0D1 2010S-G0D1 02-330816D01 02-330816D02	500mm
200mm	Beginning Series Description	AE-150/200CR- or AE-150/200CA-			
	Series 59: 0.059" (1.500mm)				
	Series 49: 0.049" (1.250mm)		4908P-G0D0	4910P-G0D0	4912P-G0D0
	Series 39: 0.039" (1.000mm)	3905P-G0D0			
	Series 31: 0.031" (0.800mm)		3108P-G0D0	3110P-G0D0 02-352105D01 02-352105D02	
	Series 29: 0.029" (0.725mm)				
	Series 23: 0.023" (0.575mm)		2308E-G1D1 2308S-G1D1	2310E-G1D1 2310S-G1D1 02-321895D01 02-323584D01	2312E-G1D1
	Series 20: 0.020" (0.500mm)		2008E-G0D1 2008S-G0D1	2010E-G0D1 2010S-G0D1 02-330816D01 02-330816D02	
300mm	Beginning Series Description	AE-300CR-			
	Series 59: 0.059" (1.500mm)				
	Series 49: 0.049" (1.250mm)		4908P-G0D0	4910P-G0D0	
	Series 39: 0.039" (1.000mm)		3908S-G0D0	3910S-G0D0 02-178674D01 02-144677-01	3912S-G0D0
2000PR	Beginning Series Description				
	Series 79: 0.079" (2.000mm)				
3000PR	Beginning Series Description				
	Series 79: 0.079" (2.000mm)				

Where Conax product series are shown in the chart, they are usually available for shipment within 1 week. To help you understand how our product series differ from the OEM, we have colored the wire/quartz size for the standard OEM product in yellow and the long life OEM series in blue. In these yellow and blue colored cells you will find the OEM part number shown in italics for your reference. Please

use this chart to customize and specify the thermocouple sets you would like to use. Special introductory pricing is available for testing and qualification sets—please ask your salesperson for details.

Bijunction Thermocouples				Front Thermocouples				Side Thermocouples				Rear Thermocouples			
Wire Diameter				Wire Diameter				Wire Diameter				Wire Diameter			
Variation 05 DIA = .005" (.127mm)	Variation 08 DIA = .008" (.203mm)	Variation 10 DIA = .010" (.254mm)	Variation 12 DIA = .012" (.305mm)	Variation 05 DIA = .005" (.127mm)	Variation 08 DIA = .008" (.203mm)	Variation 10 DIA = .010" (.254mm)	Variation 12 DIA = .012" (.305mm)	Variation 05 DIA = .005" (.127mm)	Variation 08 DIA = .008" (.203mm)	Variation 10 DIA = .010" (.254mm)	Variation 12 DIA = .012" (.305mm)	Variation 05 DIA = .005" (.127mm)	Variation 08 DIA = .008" (.203mm)	Variation 10 DIA = .010" (.254mm)	Variation 12 DIA = .012" (.305mm)
AE-150B-				AE-150F-				AE-150S-				AE-150R-			
	5908P	5910P	5912P		5908P	5910P	5912P		5908P	5910P	5912P	5905P	5908P	5910P	5912P
	4908P*	4910P* 02-352074D01			4908P*	4910P* 02-352119D01			4908P*	4910P* 02-352078D01			4908P*	4910P* 02-352076D01	
	3908P	3010P			3908P	3010P			3908P	3010P			3908E	3910E	3912E
	3908E	3910E			3908E	3910E			3908E	3910E					
	2908S	2910S 02-327874D01			2908S	2910S 02-323647D01			2908S	2910S 02-323649D01			2908S	2910S 02-323648D01	
AE-200B-				AE-200F-				AE-200S-				AE-200R-			
	5908P	5910P	5912P		5908P	5910P	5912P		5908P	5910P	5912P	5905P	5908P	5910P	5912P
	4908P*	4910P* 02-352066D01			4908P*	4910P* 02-352118D01			4908P*	4910P* 02-352072D01			4908P*	4910P* 02-352070D01	
	3908P	3910P			3908P	3910P			3908P	3910P			3908E	3910E	3912E
	3908E	3910E			3908E	3910E			3908E	3910E					
	2908S	2910S 02-327875D01			2908S	2910S 02-323652D01			2908S	2910S 02-323654D01			2908S	2910S 02-323653D01	
AE-300B-				AE-300F-				AE-300S-				AE-300R-			
	4908P*	4910P*			4908P*	4910P*			4908P*	4910P*			4908P*	4910P*	
	3908S	3910S 02-178704D01			3908S	3910S			3908S	3910S 02-178706D01			3908S	3910S 02-178705D01	
Front-Side				Front-Rear				Side-Rear							
AE-2000PR-FS-				AE-2000PR-FR-				AE-2000PR-SR-							
	7910S 02-338332-01	7912S			7910S 02-338455-01	7912S			7910S 1061-542-01	7912S					
AE-3000PR-FS-				AE-3000PR-FR-				AE-2000PR-SR-							
	7910S 1070-292-01	7912S			7910S 1070-291-01	7912S			7910S	7912S					



# How to use this Product Selection Chart

Inside of each cell:

- Conax existing Series numbers shown in **bold type**
- OEM part numbers shown in *italic type*
- White, yellow, and blue shaded cell = Conax design possibilities
- Yellow shaded cell = OEM standard sheath and wire size
- Blue shaded cell = OEM long life sheath and wire size
- Orange shaded cell = Special Susceptor and Ring required
- Gray shaded cell = Not a Conax recommended design
- The majority of existing Conax part numbers are available to be shipped within one week. Some may be shipped within one day.
- Ask your Conax salesperson for assistance in using this chart.

Quartz Quality Index

- Series Number XXXXP = Premium Quality Quartz
- Series Number XXXXE = Enhanced Quality Quartz
- Series Number XXXXS = Standard Quality Quartz

EtchDefender™

Any thermocouple offered may have EtchDefender™ coating added for the ultimate quartz sheath life available. Simply add “-E3” suffix to a TC description.




- For example...
- AE-200R-2910S = Standard design
- AE-200R-2910S-E3 = Standard design with EtchDefender™

Important Conax Long Life Sensor Feature vs. OEM

\*The Conax sheath thickness of 1.250mm is slightly thicker than the OEM sheath thickness of 1.200mm. Some OEM long life sensors have wire(s) directly exposed to quartz, making platinum wire vulnerable to attack and causing premature calibration drift. However, Conax long life sensors have both wires isolated from each other and quartz sheath protection all the way to the measurement junction. OEM sensor part numbers are denoted by italic type.

# Profile Thermocouples for Diffusion Furnaces

Conax profile thermocouples are high-precision temperature sensors standard and custom designed for the semiconductor, solar and LED industries. These thermocouples are engineered to address the critical process temperature measurement and control required for those industries.

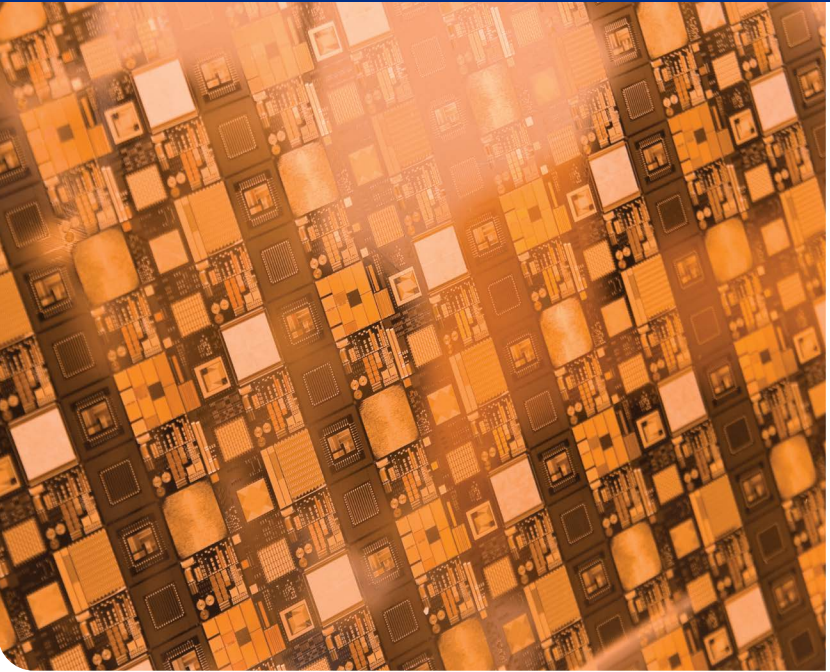


Profile Thermocouple for ASM Advance® 4XX

Conax offers Profile thermocouples for the A4XX furnace. Shown is a standard 5-zone configuration. Product design options include extra thick or removable sheaths, vacuum feedthroughs for the lead wires and abilities to customize other product features.



Profile Thermocouple for the Tokyo Electron

Conax offers Profile thermocouples for TEL furnaces such as the Alpha® series shown.

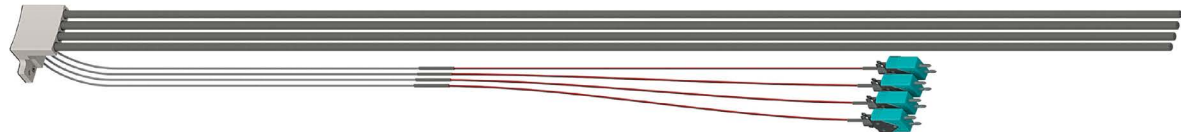


Profile Thermocouple for Hitachi Kokusai Electron

Conax offers Profile thermocouples for Kokusai furnaces such as the Vertron® series show—available with either quartz (as shown) or SiC sheaths.


Conax offers a variety of straight sheath profile TCs primarily for horizontal furnace applications. These may be equipped with sheaths that have quartz socket connections as shown below or without. We provide replacement sheaths for processes that attack sheaths fast while the internal TC is still functioning and accurate. We also provide wire/insulator assemblies for retrofit into furnace tubes that have integral TC sheaths.



The internal thermocouples are typically supplied with a 3-zone or 5-zone configuration. The thermocouple wire can populate either a single 6-hole or 10-hole insulator. Alternatively, the wires can populate three or five 2-hole insulators.

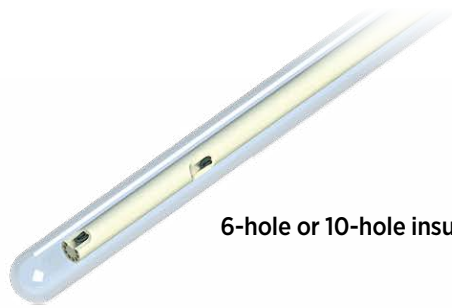

6-hole or 10-hole insulator

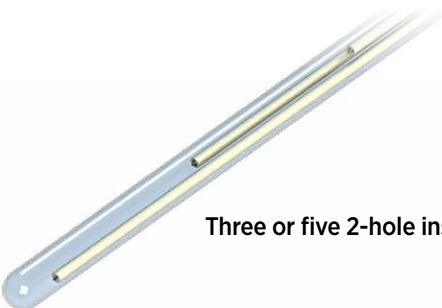

Three or five 2-hole insulators

Connectorization is accommodated by standard or miniature 2-pin connectors. Multi-pin screw or bayonet-style connectors are also offered. The lead wires between the probe and the connectors run continuously using the same noble metal thermocouple wire that is installed in the quartz sheath. As a cost savings option, Conax can transition to extension grade wire for the lead wires.







# Spike Thermocouples for Diffusion Furnaces

## Single Spike Thermocouples vs. Dual Spike Thermocouple.

Spike thermocouples or torch thermocouples can be ordered as single or dual (two measuring junctions). Dual spike thermocouples are often used for a redundant measurement in the event that one circuit fails. Duals may also be used to track sensor drift. This is accomplished by populating one of the dual circuits with a different calibration wire (typically R,

S, or B) than the other circuit. As the thermocouple circuits age, they will drift. Different calibrations will drift at different rates. Comparing the rate of drift differential will give an indication as to the amount of drift the particular dual spike is experiencing, and by extension, the rate of drift for the other spikes. Spike recalibration or replacement decisions may be made based on objective criterion rather than arbitrary time-based maintenance schedules.

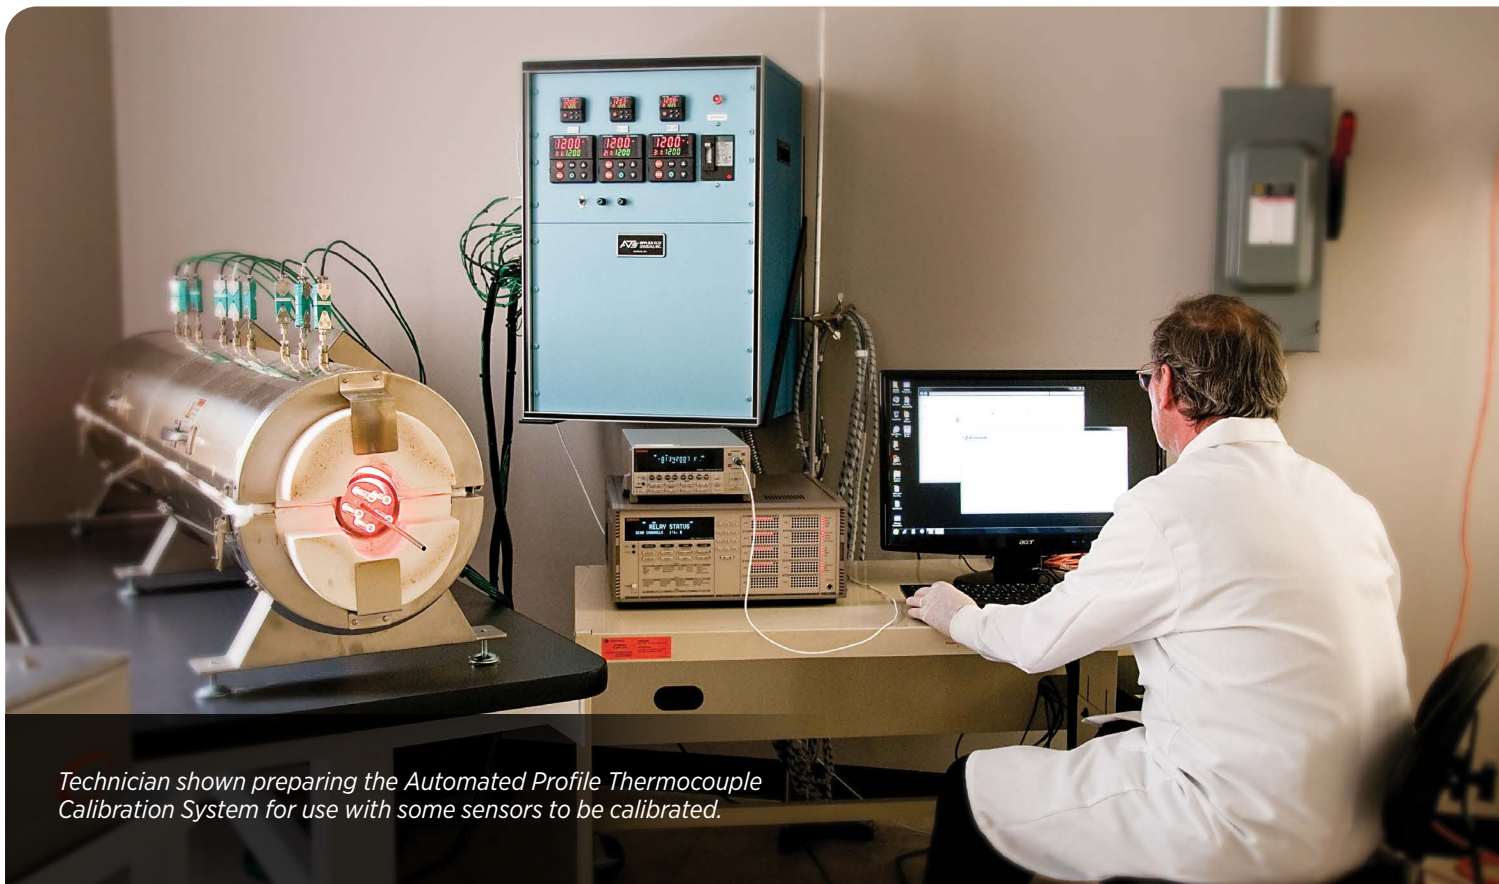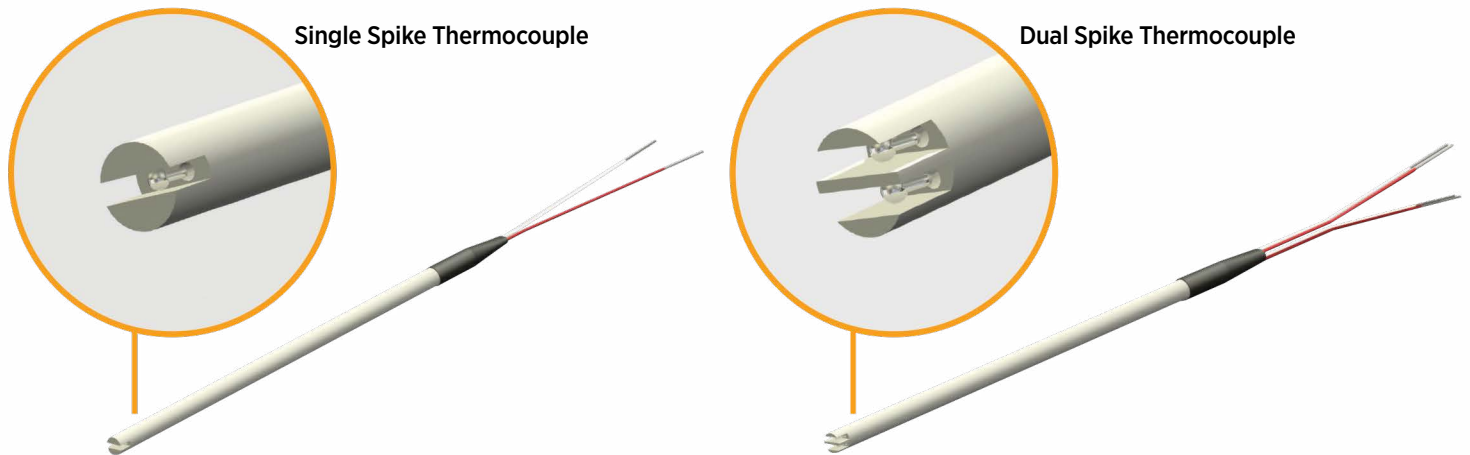

*Technician shown preparing the Automated Profile Thermocouple Calibration System for use with some sensors to be calibrated.*



# Profile Thermocouple Calibrations


Conax offers Profile Thermocouple calibrations at standard or customer specified temperature intervals. All calibrations are conducted under the guidance of our quality system, certified to ISO 9001:2008 and are performed by comparison techniques as defined in ASTM E220. Conax utilizes primary and secondary standard thermocouples that are traceable to NIST and state-of-the-art equipment with a custom automated process control and data acquisition system (see photo below on page 14).

Our Automated Profile TC Calibration System continuously monitors the thermocouple outputs while simultaneously controlling the temperature ramp of the furnace. This system requires that the thermocouples stabilize at each calibration temperature before data is collected, then converts the thermocouple millivolt signal to a temperature, and compares this information to the standard. The offset and acceptance to defined limits is all determined without technician intervention, thereby eliminating possible human error and providing optimal accuracy.

Profile Thermocouples offer a unique calibration challenge because of their length and the fact that multiple thermocouples are located at various positions along the length of the unit. Conax has developed a unique system which employs a specially designed 60" long calibration furnace that allows us to simultaneously calibrate up to four 5-Point Profile Thermocouples at a single time (i.e., 20 total thermocouples). The standard and calibration thermocouples reside in the same furnace tube as the units under calibration, minimizing the thermal gradient between them.

"Unit Calibration" is the individual calibration of Profile Thermocouples, as described in the previous section. Data is provided in a table format over a defined temperature range with the offsets in both degrees Celsius and millivolt format. (See the sensor calibration table [SCT] above for more details.) Unit Calibration is available upon request and is a cost added option to any profile thermocouple.


As an alternative, "Bulk Wire Calibration" is available upon request at no extra charge. Wire from each lot of material is electrically annealed, bound to the standard with platinum wire to ensure temperature uniformity and calibrated using the Automated Thermocouple Calibration System. Calibrated wire is then released for production with a Bulk Wire Calibration Certificate. Conax will provide bulk wire calibration data in the SCT format depicted above.



Conax Technologies Products: www.conaxtechnologies.com  
P.O. Box 100000, Conax Technologies, LLC, www.conaxtechnologies.com

Serial Number: S22681-1-001-T1

Conax Part Number: 10-1935-001-S-MPJ



# Sensor Calibration Table

Report Number: 1000004

Sensor Type: S

Unit Calibration: X

Bulk Wire Calibration

For each temperature reading, add the mV or temperature offset to obtain the corrected value.

Temp	Offset	Temp	Offset	Temp	Offset	Temp	Offset	Temp	Offset
°C	mV	°C	mV	°C	mV	°C	mV	°C	mV
400	-0.007	725	-0.008	850	-0.009	775	-0.009	850	-0.009
405	-0.007	730	-0.008	855	-0.009	780	-0.009	855	-0.009
410	-0.007	735	-0.008	860	-0.009	785	-0.009	860	-0.009
415	-0.007	740	-0.008	865	-0.009	790	-0.009	865	-0.009
420	-0.007	745	-0.008	870	-0.009	795	-0.009	870	-0.009
425	-0.007	750	-0.009	875	-0.009	800	-0.009	875	-0.009
430	-0.007	755	-0.009	880	-0.009	805	-0.009	880	-0.009
435	-0.008	760	-0.009	885	-0.009	810	-0.009	885	-0.009
440	-0.008	765	-0.009	890	-0.009	815	-0.009	890	-0.009
445	-0.008	770	-0.009	895	-0.009	820	-0.009	895	-0.009
450	-0.008	775	-0.009	900	-0.009	825	-0.009	900	-0.009
455	-0.008	780	-0.009	905	-0.009	830	-0.009	905	-0.009
460	-0.008	785	-0.009	910	-0.009	835	-0.009	910	-0.009
465	-0.008	790	-0.009	915	-0.009	840	-0.009	915	-0.009
470	-0.008	795	-0.009	920	-0.008	845	-0.009	920	-0.008
475	-0.008	800	-0.009	925	-0.008	850	-0.009	925	-0.008
480	-0.008	805	-0.009	930	-0.008	855	-0.009	930	-0.008
485	-0.008	810	-0.009	935	-0.008	860	-0.009	935	-0.008
490	-0.008	815	-0.009	940	-0.008	865	-0.009	940	-0.008
495	-0.008	820	-0.009	945	-0.008	870	-0.009	945	-0.008
500	-0.008	825	-0.009	950	-0.008	875	-0.009	950	-0.008
505	-0.008	830	-0.009	955	-0.008	880	-0.009	955	-0.008
510	-0.008	835	-0.009	960	-0.008	885	-0.009	960	-0.008
515	-0.008	840	-0.009	965	-0.008	890	-0.009	965	-0.008
520	-0.008	845	-0.009	970	-0.008	895	-0.009	970	-0.008
525	-0.008	850	-0.009	975	-0.008	900	-0.009	975	-0.008
530	-0.008	855	-0.009	980	-0.008	905	-0.009	980	-0.008
535	-0.008	860	-0.009	985	-0.008	910	-0.009	985	-0.008
540	-0.008	865	-0.009	990	-0.008	915	-0.009	990	-0.008
545	-0.008	870	-0.009	995	-0.008	920	-0.009	995	-0.008
550	-0.008	875	-0.009	1000	-0.008	925	-0.009	1000	-0.008
555	-0.008	880	-0.009	1005	-0.008	930	-0.009	1005	-0.008
560	-0.008	885	-0.009	1010	-0.008	935	-0.009	1010	-0.008
565	-0.008	890	-0.009	1015	-0.008	940	-0.009	1015	-0.008
570	-0.008	895	-0.009	1020	-0.008	945	-0.009	1020	-0.008
575	-0.008	900	-0.009	1025	-0.008	950	-0.009	1025	-0.008
580	-0.008	905	-0.009	1030	-0.008	955	-0.009	1030	-0.008
585	-0.008	910	-0.009	1035	-0.008	960	-0.009	1035	-0.008
590	-0.008	915	-0.009	1040	-0.008	965	-0.009	1040	-0.008
595	-0.008	920	-0.009	1045	-0.008	970	-0.009	1045	-0.008
600	-0.008	925	-0.009	1050	-0.008	975	-0.009	1050	-0.008
605	-0.008	930	-0.009	1055	-0.008	980	-0.009	1055	-0.008
610	-0.008	935	-0.009	1060	-0.008	985	-0.009	1060	-0.008
615	-0.008	940	-0.009	1065	-0.008	990	-0.009	1065	-0.008
620	-0.008	945	-0.009	1070	-0.008	995	-0.009	1070	-0.008
625	-0.008	950	-0.009	1075	-0.008	1000	-0.009	1075	-0.008
630	-0.008	955	-0.009	1080	-0.008	1005	-0.009	1080	-0.008
635	-0.008	960	-0.009	1085	-0.008	1010	-0.009	1085	-0.008
640	-0.008	965	-0.009	1090	-0.008	1015	-0.009	1090	-0.008
645	-0.008	970	-0.009	1095	-0.008	1020	-0.009	1095	-0.008
650	-0.008	975	-0.009	1100	-0.008	1025	-0.009	1100	-0.008
655	-0.008	980	-0.009	1105	-0.008	1030	-0.009	1105	-0.008
660	-0.008	985	-0.009	1110	-0.008	1035	-0.009	1110	-0.008
665	-0.008	990	-0.009	1115	-0.008	1040	-0.009	1115	-0.008
670	-0.008	995	-0.009	1120	-0.008	1045	-0.009	1120	-0.008
675	-0.008	1000	-0.009	1125	-0.008	1050	-0.009	1125	-0.008
680	-0.008	1005	-0.009	1130	-0.008	1055	-0.009	1130	-0.008
685	-0.008	1010	-0.009	1135	-0.008	1060	-0.009	1135	-0.008
690	-0.008	1015	-0.009	1140	-0.008	1065	-0.009	1140	-0.008
695	-0.008	1020	-0.009	1145	-0.008	1070	-0.009	1145	-0.008
700	-0.008	1025	-0.009	1150	-0.008	1075	-0.009	1150	-0.008
705	-0.008	1030	-0.009	1155	-0.008	1080	-0.009	1155	-0.008
710	-0.008	1035	-0.009	1160	-0.008	1085	-0.009	1160	-0.008
715	-0.008	1040	-0.009	1165	-0.008	1090	-0.009	1165	-0.008
720	-0.008	1045	-0.009	1170	-0.008	1095	-0.009	1170	-0.008
725	-0.008	1050	-0.009	1175	-0.008	1100	-0.009	1175	-0.008
730	-0.008	1055	-0.009	1180	-0.008	1105	-0.009	1180	-0.008
735	-0.008	1060	-0.009	1185	-0.008	1110	-0.009	1185	-0.008
740	-0.008	1065	-0.009	1190	-0.008	1115	-0.009	1190	-0.008
745	-0.008	1070	-0.009	1195	-0.008	1120	-0.009	1195	-0.008
750	-0.008	1075	-0.009	1200	-0.008	1125	-0.009	1200	-0.008
755	-0.008	1080	-0.009	1205	-0.008	1130	-0.009	1205	-0.008
760	-0.008	1085	-0.009	1210	-0.008	1135	-0.009	1210	-0.008
765	-0.008	1090	-0.009	1215	-0.008	1140	-0.009	1215	-0.008
770	-0.008	1095	-0.009	1220	-0.008	1145	-0.009	1220	-0.008
775	-0.008	1100	-0.009	1225	-0.008	1150	-0.009	1225	-0.008
780	-0.008	1105	-0.009	1230	-0.008	1155	-0.009	1230	-0.008
785	-0.008	1110	-0.009	1235	-0.008	1160	-0.009	1235	-0.008
790	-0.008	1115	-0.009	1240	-0.008	1165	-0.009	1240	-0.008
795	-0.008	1120	-0.009	1245	-0.008	1170	-0.009	1245	-0.008
800	-0.008	1125	-0.009	1250	-0.008	1175	-0.009	1250	-0.008
805	-0.008	1130	-0.009	1255	-0.008	1180	-0.009	1255	-0.008
810	-0.008	1135	-0.009	1260	-0.008	1185	-0.009	1260	-0.008
815	-0.008	1140	-0.009	1265	-0.008	1190	-0.009	1265	-0.008
820	-0.008	1145	-0.009	1270	-0.008	1195	-0.009	1270	-0.008
825	-0.008	1150	-0.009	1275	-0.008	1200	-0.009	1275	-0.008
830	-0.008	1155	-0.009	1280	-0.008	1205	-0.009	1280	-0.008
835	-0.008	1160	-0.009	1285	-0.008	1210	-0.009	1285	-0.008
840	-0.008	1165	-0.009	1290	-0.008	1215	-0.009	1290	-0.008
845	-0.008	1170	-0.009	1295	-0.008	1220	-0.009	1295	-0.008
850	-0.008	1175	-0.009	1300	-0.008	1225	-0.009	1300	-0.008
855	-0.008	1180	-0.009	1305	-0.008	1230	-0.009	1305	-0.008
860	-0.008	1185	-0.009	1310	-0.008	1235	-0.009	1310	-0.008
865	-0.008	1190	-0.009	1315	-0.008	1240	-0.009	1315	-0.008
870	-0.008	1195	-0.009	1320	-0.008	1245	-0.009	1320	-0.008
875	-0.008	1200	-0.009	1325	-0.008	1250	-0.009	1325	-0.008
880	-0.008	1205	-0.009	1330	-0.008	1255	-0.009	1330	-0.008
885	-0.008	1210	-0.009	1335	-0.008	1260	-0.009	1335	-0.008
890	-0.008	1215	-0.009	1340	-0.008	1265	-0.009	1340	-0.008
895	-0.008	1220	-0.009	1345	-0.008	1270	-0.009	1345	-0.008
900	-0.008	1225	-0.009	1350	-0.008	1275	-0.009	1350	-0.008
905	-0.008	1230	-0.009	1355	-0.008	1280	-0.009	1355	-0.008
910	-0.008	1235	-0.009	1360	-0.008	1285	-0.009	1360	-0.008
915	-0.008	1240	-0.009	1365	-0.008	1290	-0.009	1365	-0.008
920	-0.008	1245	-0.009	1370	-0.008	1295	-0.009	1370	-0.008
925	-0.008	1250	-0.009	1375	-0.008	1300	-0.009	1375	-0.008
930	-0.008	1255	-0.009	1380	-0.008	1305	-0.009	1380	-0.008
935	-0.008	1260	-0.009	1385	-0.008	1310	-0.009	1385	-0.008
940	-0.008	1265	-0.009	1390	-0.008	1315	-0.009	1390	-0.008
945	-0.008	1270	-0.009	1395	-0.008	1320	-0.009	1395	-0.008
950	-0.008	1275	-0.009	1400	-0.008	1325	-0.009	1400	-0.008
955	-0.008	1280	-0.009	1405	-0.008	1330	-0.009	1405	-0.008
960	-0.008	1285	-0.009	1410	-0.008	1335	-0.009	1410	-0.008
965	-0.008	1290	-0.009	1415	-0.008	1340	-0.009	1415	-0.008
970	-0.008	1295	-0.009	1420	-0.008	1345	-0.009	1420	-0.008
975	-0.008	1300	-0.009	1425	-0.008	1350	-0.009	1425	-0.008
980	-0.008	1305	-0.009	1430	-0.008	1355	-0.009	1430	-0.008
985	-0.008	1310	-0.009	1435	-0.008	1360	-0.009	1435	-0.008
990	-0.008	1315	-0.009	1440	-0.008	1365	-0.009	1440	-0.008
995	-0.00								



EPSILON® and Advance® are registered trademarks of ASM International. Alpha® is a registered trademark of Tokyo Electron. Vertron® is a registered trademark of Hitachi Kokusai Electric. Neither Conax Technologies nor its products are affiliated with, approved by or sponsored by ASM International, Tokyo Electron or Hitachi Kokusai Electric. Conax Semiconductor is a trademark of Conax Technologies.

2300 Walden Avenue, Buffalo, New York 14225 US  
**+1 800 223 2389 (P) | +1 716 684 7433 (F)**  
**Conax@ConaxTechnologies.com**  
Bulletin 6041, Rev E''' ©2025 Conax Technologies 3/25

  
**Ideas. Solutions. Success.**