


TOLERANCES FOR A 100Ω PLATINUM RTD PER IEC 751-95

Temperature Deg (C)	Tolerance			
	Class B		Class A	
	(±C) ⁽¹⁾	(±0hm)	(±C) ⁽²⁾	(±0hm)
-200	1.30	0.56	0.55	0.24
-100	0.80	0.32	0.35	0.14
0	0.30	0.12	0.15	0.06
100	0.80	0.30	0.35	0.13
200	1.30	0.48	0.55	0.20
300	1.80	0.64	0.75	0.27
400	2.30	0.79	0.95	0.33
500	2.80	0.93	1.15	0.38
600	3.30	1.06	1.35	0.43

Notes: (1) $C = \pm(.3 + .005 * [t])$ • (2) $C = \pm(.15 + .002 * [t])$

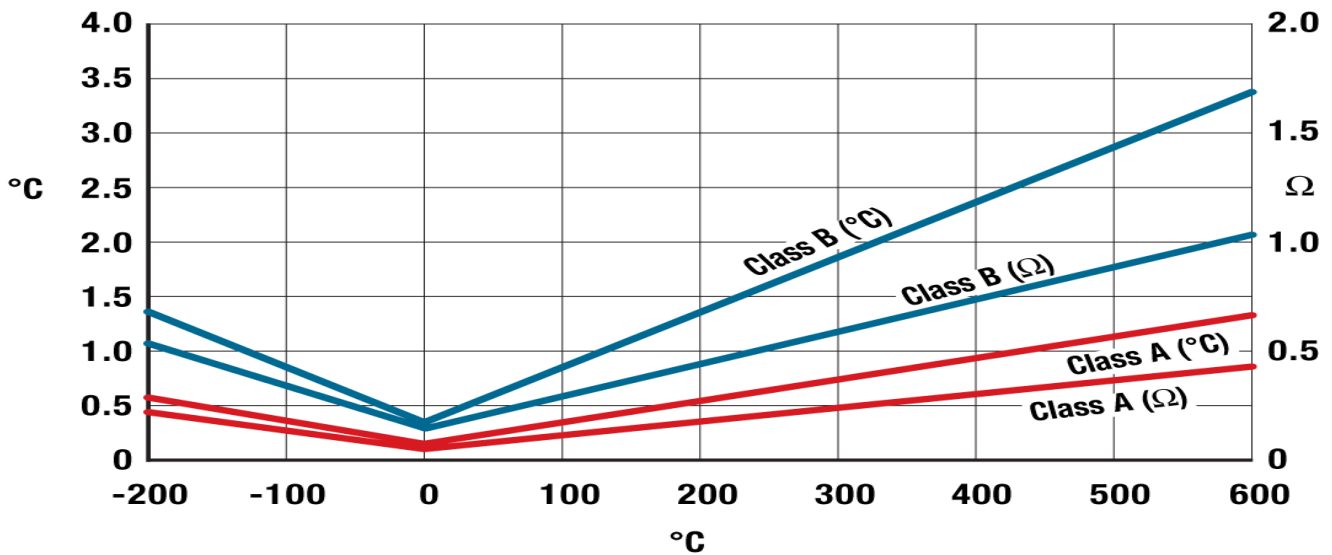

2300 Walden Avenue
Buffalo, New York 14225 US