


TOLERANCES FOR A 100Ω PLATINUM RTD PER IEC 751-95

Temperature Deg (C)	Tolerance			
	Class B		Class A	
	(±C) ⁽¹⁾	(±0hm)	(±C) ⁽²⁾	(±0hm)
-200	1.30	0.56	0.55	0.24
-100	0.80	0.32	0.35	0.14
0	0.30	0.12	0.15	0.06
100	0.80	0.30	0.35	0.13
200	1.30	0.48	0.55	0.20
300	1.80	0.64	0.75	0.27
400	2.30	0.79	0.95	0.33
500	2.80	0.93	1.15	0.38
600	3.30	1.06	1.35	0.43

Notes: (1) $C = \pm(.3 + .005 * [t])$ • (2) $C = \pm(.15 + .002 * [t])$

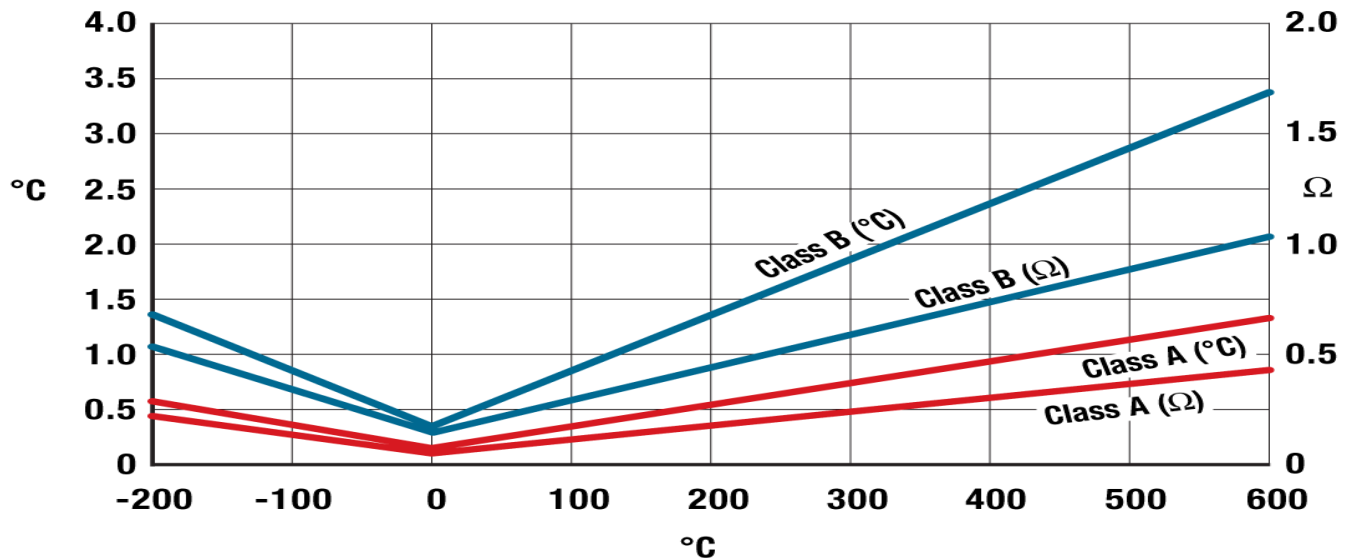

2300 Walden Avenue • Buffalo, New York 14225 USA
 Fax: 716-684-7433 • Phone: 716-684-4500
 Toll free in the USA at 1-800-223-2389
 E-mail: sales@conaxtechnologies.com
 Website: www.conaxtechnologies.com